


FIXING AT TOP OF ROCK FACE (TYPE 1)

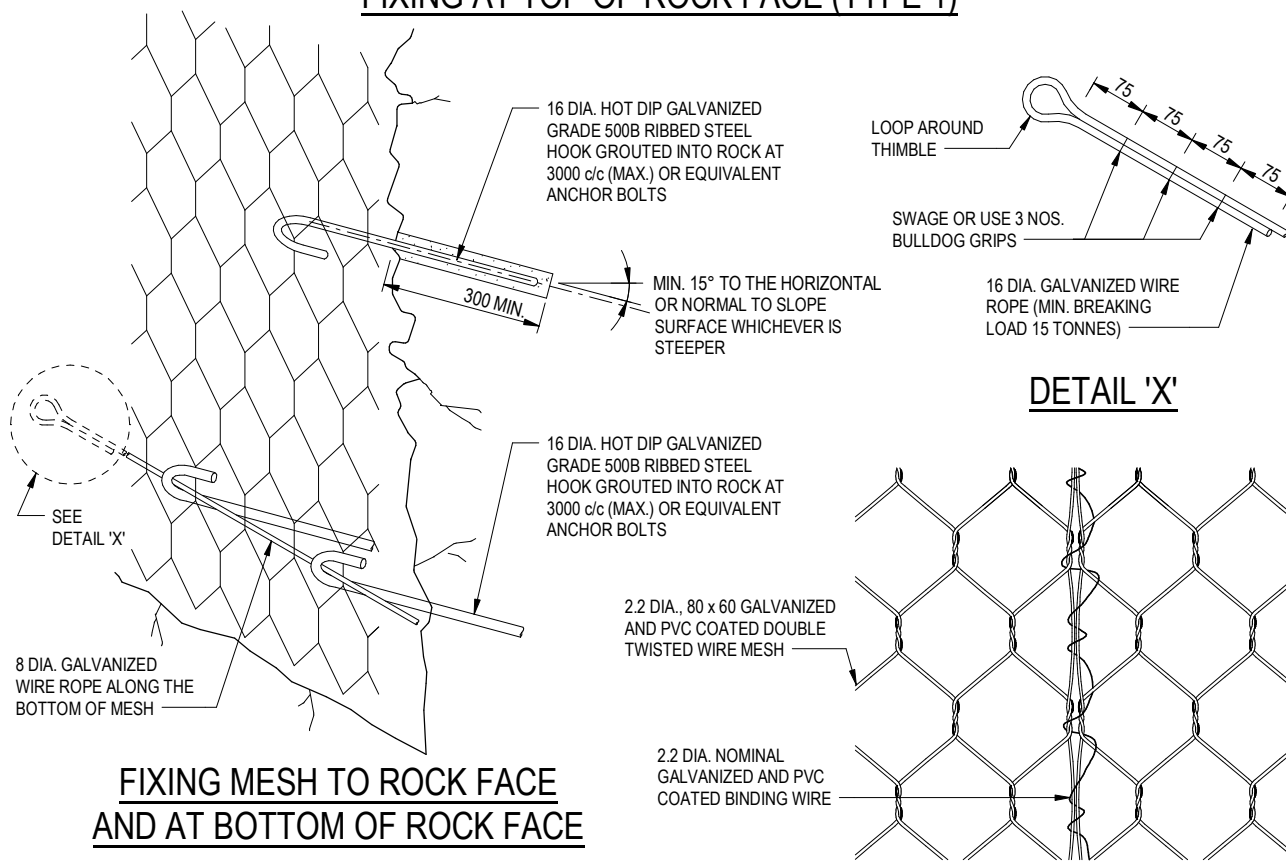

FIXING MESH TO ROCK FACE AND AT BOTTOM OF ROCK FACE

DETAIL 'X'

LACING OF ADJACENT MESH SHEETS


NOTES:

1. ALL DIMENSIONS ARE IN MILLIMETRES.
2. PVC THICKNESS SHALL BE 0.4 mm MINIMUM.
3. COLOUR OF PVC COATING SHALL BE SPECIFIED BY THE ENGINEER TO MATCH WITH COLOUR OF ROCK FACE WHERE POSSIBLE.
4. SPACING OF THE STEEL HOOKS OR EQUIVALENT ANCHOR BOLTS SHALL BE REDUCED WHERE APPROPRIATE TO ENSURE THAT THE WIRE MESH CLOSELY FOLLOWS THE ROCK SLOPE PROFILE PARTICULARLY ON RUGGED ROCK SURFACE.

5. REFER TO SHEET 2 OF 2 FOR ALTERNATIVE FIXING OF WIRE MESH AT TOP OF ROCK FACE.

FIXING OF WIRE MESH TO ROCK FACE (SHEET 1 OF 2)

A	BIM OBJECT REVISION.	Original Signed	12.2025
-	FORMER DRG. NO. C2205F.	Original Signed	08.2024
REF.	REVISION	SIGNATURE	DATE

 CIVIL ENGINEERING AND DEVELOPMENT DEPARTMENT			
SCALE	DIAGRAMMATIC	DRAWING NO.	C2205 /1A
DATE	JAN 1991		