


FIXING AT TOP OF ROCK FACE

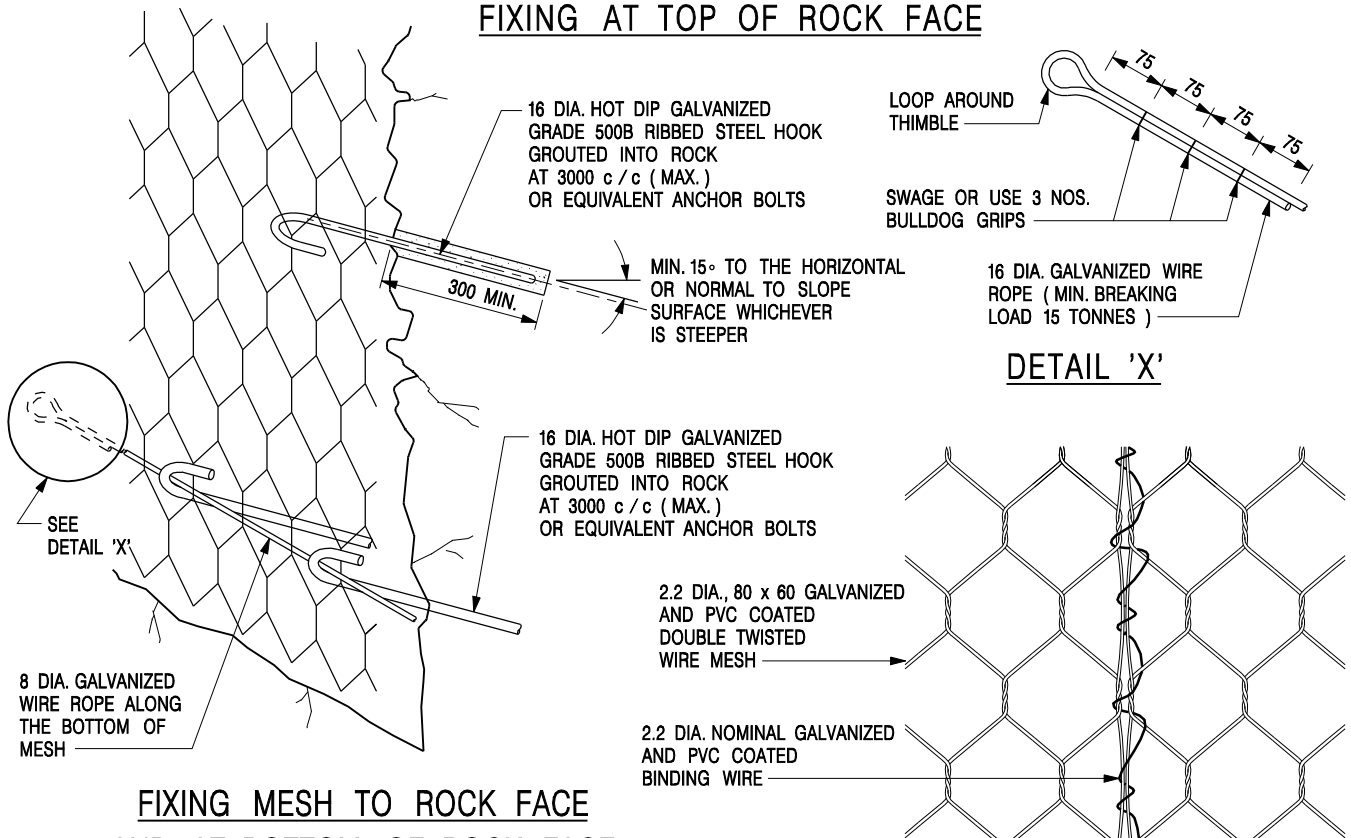

FIXING MESH TO ROCK FACE AND AT BOTTOM OF ROCK FACE

DETAIL 'X'

LACING OF ADJACENT MESH SHEETS

NOTES:

1. ALL DIMENSIONS ARE IN MILLIMETRES.
2. PVC THICKNESS SHALL BE 0.4mm MINIMUM.
3. COLOUR OF PVC COATING SHALL BE SPECIFIED BY THE ENGINEER TO MATCH WITH COLOUR OF ROCK FACE WHERE POSSIBLE.
4. SPACING OF THE STEEL HOOKS OR EQUIVALENT ANCHOR BOLTS SHALL BE REDUCED WHERE APPROPRIATE TO ENSURE THAT THE WIRE MESH CLOSELY FOLLOWS THE ROCK SLOPE PROFILE PARTICULARLY ON RUGGED ROCK SURFACE.

REF.	REVISION	SIGNATURE	DATE
F	GRADE OF RE-BAR AMENDED.	Original Signed	12.2014
E	NOTE 4 ADDED.	Original Signed	08.2014
D	MESH AT BOTTOM OF SLOPE FACE REVISED.	Original Signed	08.2007
C	NOTE 3 ADDED.	Original Signed	01.2005
B	GENERAL REVISION.	Original Signed	12.2002
A	MINOR AMENDMENT.	Original Signed	08.2001

FIXING OF WIRE MESH TO ROCK FACE



CIVIL ENGINEERING AND DEVELOPMENT DEPARTMENT

SCALE DIAGRAMMATIC

DRAWING NO.

DATE JAN 1991

C2205F